


DMM – Digital Multi Meter

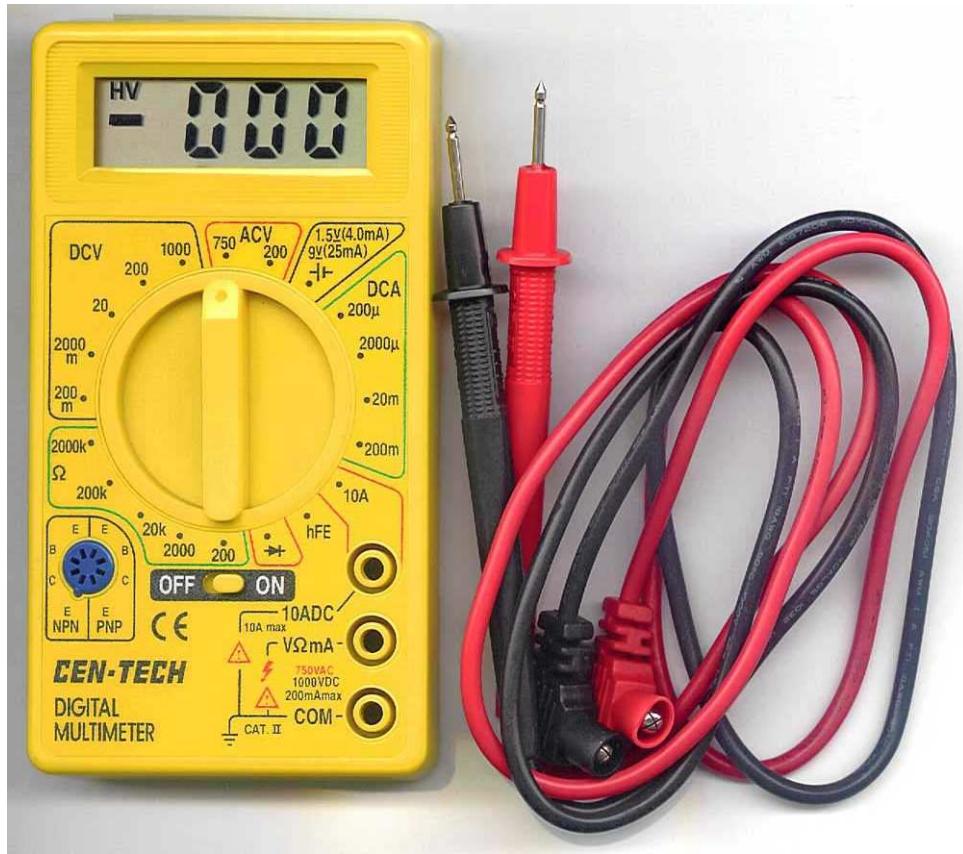

Specifications

Frequency	45 – 450 Hz
DC Amps	Ranges: 200uA, 2000uA, 20mA, 200mA, 10A
Accuracy	(@ 200uA – 200mA) 1.2% +/- 2D; (@ 10A) 3% +/- 2D
DC Voltage	Ranges: 200mV, 2000mV, 20V, 200V, 1000V
Accuracy	(@ 200mV) 0.5% +/- 1D (@ 2000mV – 200V) 1.0% +/- 1D (@ 1000V) 1.0% +/- 2D
AC Voltage	Ranges: 200V, 750V
Accuracy	(45 – 450 Hz) 1.2% +/- 10D
Resistance	Ranges: 200 ohm, 2000 ohm, 20k, 200k, 2000k Ohm
Accuracy	(@ 200 ohm – 200 k Ohm) 0.8% +/- 2D (@ 2000 k Ohm) 1.0% +/- 2D
Sampling Rate	2.5 times per second
Overload Protection	Fast-Acting 250mA / 250V Fuse
Operating Temperature	Range: 32 deg – 104 deg F
Display	½" high 3-1/2 digit LCD
Battery	One 9V (included)
Weight	0.45 lb.
Features	32" Test Leads, Transistor (NPN and PNP) Testing Function, Automatic Polarity and Zero Adjust.